

HOW TO MEASURE FOR A 3-POINT SEAT BELT

Follow these simple steps to ensure you get the right seat belt for your vehicle.



1 SELECT BUCKLE



Would you like floppy, sleeved or cable style?



Floppy

Sleeved

Cable


- Bench seats require floppy buckle
- Cable only available with end release

Determine buckle length



Measure from center of mounting hole to end of buckle

2 MEASURE B and C

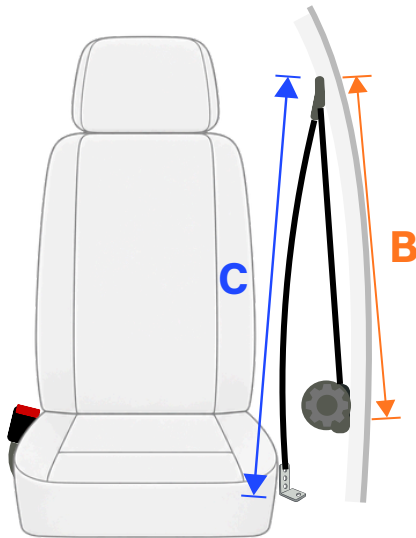

- 1 Unbuckle seat belt
- 2 Allow the seat belt to retract completely
- 3 Take B and C measurements as described below

B

Measure from the center of retractor mounting point to the center of the upper D-Ring / door post fitting mounting point

C

Measure from the center of the upper D-Ring / door post fitting mounting point to the lower outboard anchor mounting point

Measure mounting point to mounting point. Do not measure overall webbing length.

**If your seat belt does not have a mounting point above your shoulder, give us a call to order*

3 CALCULATE LENGTHS

A _____ Buckle side

B _____ + **C** _____ + 75" = _____

B + C + 75" is the maximum length of the retractable side of your seat belt

4 MOUNTING HARDWARE

- If your seat belt retractor mounting hole is on the floor, you will need **Hardware Kit #1 (Part # 950001)**
- If your seat belt retractor mounting hole is on the vertical pillar, you will need **Hardware Kit #2 (Part # 950002)**



IMPORTANT!

DO NOT MEASURE THE SEAT BELT WHILE IT IS BUCKLED



Need help? Contact one of our experts!

405-736-0088

askus@seatbeltplanet.com